

Please write clearly in	n block capitals	
Centre number	Candidate number	
Surname		_
Forename(s)		_
Candidate signature	I declare this is my own work.	- ノ

GCSE COMPUTER SCIENCE

Paper 2 Computing concepts

Thursday 25 May 2023

Afternoon

Time allowed: 1 hour 45 minutes

Materials

- There are no additional materials required for this paper.
- You must not use a calculator.

Instructions

- Use black ink or black ball-point pen. Use pencil only for drawing.
- Answer all questions.
- You must answer the questions in the spaces provided.
- If you need extra space for your answer(s), use the lined pages at the end of this book. Write the question number against your answer(s).
- Do all rough work in this book. Cross through any work you do not want to be marked.

Information

• The total number of marks available for this paper is 90.

• THE IOIAI

Advice

i oi iiie muiipie	-CITC	nce questions, co	JIIIPI	CiCiy	, ,,,,,	ii uic
CORRECT METHOD	•	WRONG METHODS	\S	•	#	$ \Phi $

For the multiple-choice questions, completely fill in the lozenge alongside the appropriate answer.

If you want to change your answer you must cross out your original answer as shown.

If you wish to return to an answer previously crossed out, ring the answer you now wish to select as shown.





For Exam	iner's Use					
Question	Mark					
1–6						
7						
8						
9–10						
11						
12						
13						
14						
15						
16						
TOTAL	l					



	Answer all questions in the spaces provided.							
0 1.1	The	number base 2 is called binary .						
	Sha	de one lozenge to show which number base is called hexadecimal .	[1 mark]					
	A	6						
	В	8 🔾						
	С	10 🔾						
	D	16						
0 1.2	Sha	de two lozenges to show the statements that are true about hexadecim	al. [2 marks]					
	Α	Hexadecimal can represent a greater range of numbers than binary.	0					
	В	Hexadecimal is easier for people to read than binary.	0					
	С	Hexadecimal is faster for a computer to process than binary.	0					
	D	Hexadecimal is more accurate than binary.	0					
	Ε	Hexadecimal takes less space in RAM than binary.	0					
	F	Hexadecimal takes less time to type than binary.	0					
0 2.1	Con	vert the decimal number 171 into binary.	[1 mark]					



0 2.2	Convert the hexadecimal	num	nber	2D ii	nto b	inary	/.				
	You should show your wo	orkin	g.							[2 ma	arks]
0 3	Add together the following	g thr	ee bi	inary	nun	nbers	s and	d giv	e you	ur answer in binary. [2 ma	arks]
			1								
		0	0	0	1	1	0	0	1		
	+	<u> </u>	1	<u> </u>	<u> </u>	<u> </u>	<u> </u>		<u> </u>		
0 4	Convert 16 000 000 bits to	o me	egab	vtes	(MB).					
	You should show your wo			,	(,-					
	•									[2 ma	arks]
				Ans	swer						MB



15

0 5	Describe the binary shift that would be used to divide a binary number by four. [1 mark]	•
0 6.1	When a sound wave is converted to a digital form it is sampled. The sampling rate is measured in hertz (Hz).	
	Define the term hertz. [1 mark]	
0 6.2	A sampling rate of 20 000 Hz and a sample resolution of four bits is used to make a digital recording of a sound that lasts 50 seconds.	
	What is the minimum file size of the recording in megabytes (MB)?	
	You should show your working. [3 marks]	
		Γ
	AnswerMB	



Turn over for the next question DO NOT WRITE ON THIS PAGE ANSWER IN THE SPACES PROVIDED

Turn over ▶

Do not write outside the

box



0 7.1	The term pixel is short for Picture Element.	Do not writ outside the box
	Define the term pixel . [1 mark]	
0 7.2	Figure 1 shows a 5 pixel x 5 pixel image. A minimum colour depth of two bits is needed to store the image.	
	Figure 1	
	Explain how the insers in Figure 4 can be represented as a hitman	
	Explain how the image in Figure 1 can be represented as a bitmap. [3 marks]	



7 . 3	A 10 pixel x 10 pixel image contains five different colours.															
	Calcul	Calculate the minimum file size, in bits, of this image when represented as a bitmap.											map.			
	You sh	nould	show	your	work	king.									[2	marks]
						Ans	wer_									bits
7 . 4	A blac	k and	l white	e ima	ge ha	as bee	en co	mpre	ssed ı	using	run l	ength	ence	oding	(RLE	Ξ).
7].[4]	A blac The fir seven	st bit	in ea	ch by	te of	the bi	it patt	ern re	epres	ents t	he co	olour		·	`	,
7 .	The fir seven	st bit bits o	in ea of the has a	ch by byte run c	te of repre	the bi sent t	it patt the nu pixel	ern re umbe s follo	eprese r of pi	ents t xels i by a ı	the co	olour a	and t	he rer	naini	ng
<u>7</u>].[4]	The fir seven	st bit bits o	in ea of the has a	ch by byte run c	te of repre	the bi sent t	it patt the nu pixel	ern re umbe s follo n Fig	eprese r of pi	ents t xels i by a ı	the co	olour a	and t	he rer	naini	ng
7].[4]	The fir seven	st bit bits o	in ea of the has a	ch by byte run c	te of repre	the bi sent t	it patt the nu pixel	ern re umbe s follo n Fig	eprese r of pi owed ure 2	ents t xels i by a ı	the co	olour a	and t	he rer	naini	ng
<u>7</u>].[4]	The fir seven The im repres	est bit bits of nage ented	in ea of the has a d by tl	ch by byte run c ne bit	rte of repre of 60 patte	the bi sent t black ern sh	it patt the nu pixel own i	ern re umbe s follo n Fig	eprese r of pi owed ure 2 ure 2	ents t xels i by a i	the co	olour a run. f 30 w	and the	he rer	mainii and	ng is
7].[4]	The fir seven The im repres	est bit bits on age lented	in ea of the has a d by th	ch by byte run c ne bit	rte of repreof 60 patte	the bisent to blackern sh	it patt the nu pixel own i	ern reumbe s follon Figure	epreser of pi	ents t xels i by a i	the coin the run of	olour a run. f 30 w	and the	he rer	maini	ng is
7].[4]	The fir seven The im repres	the s	in ea of the has a d by th 1 ame I white	ch by byte run c ne bit	rte of repre of 60 patte	the bi sent t black ern sh	it patt the nu pixel own i	ern reumbe s follon Figure	epreser of pi	ents t xels i by a i	the coin the run of	olour a run. f 30 w	and the	he rer	and 1	is 0 at has
7].[4]	The fir seven The in representation of the limit of the l	the s	in ea of the has a d by th 1 ame I white	ch by byte run c ne bit	rte of repre of 60 patte	the bi sent t black ern sh	it patt the nu pixel own i	ern reumbe s follon Figu	epreser of pirowed ure 2 lare 2 lattern f 15 b	ents t xels i by a i	the coin the run of	olour a run. f 30 w	and the	he rer	and 1	is 0
7].[4]	The fir seven The in representation of the limit of the l	the s	in ea of the has a d by th 1 ame I white	ch by byte run c ne bit	rte of repre of 60 patte	the bi sent t black ern sh	it patt the nu pixel own i	ern reumbe s follon Figure	epreser of pirowed ure 2 lare 2 lattern f 15 b	ents t xels i by a i	the coin the run of	olour a run. f 30 w	and the	he rer	and 1	is 0 at has

0 8 . 1	Define the term hardware. [1 mark]
0 8.2	Describe the role of each of the following components of a CPU: [3 marks] Clock
	Control unit
	Register
0 8 . 3	Give one reason why a CPU with two cores might perform faster than an equivalent CPU with only one core. [1 mark]



0 8.4	Define the term non-volatile memory .	[1 mark]	
0 8 . 5	Give one example of a type of volatile memory in a computer system.	[1 mark]	
0 8 . 6	Explain why secondary storage is required in a computer system.	[2 marks]	
	Turn over for the next question		

0 9.1	Define the term software .	[1 mark]
0 9 . 2	Define the term system software .	[1 mark]
0 9 . 3	Define the term application software .	[1 mark]
1 0 . 1	Explain the role of main memory in the execute stage of the Fetch-Ex	ecute cycle. [2 marks]
1 0 . 2	Describe the other two stages of the Fetch-Execute cycle. Fetch stage	
	Decode stage	




1 1. Complete the truth table for the **XOR** logic gate.

[1 mark]

Α	В	A XOR B
0	0	
0	1	
1	0	
1	1	

Figure 3 shows a logic circuit.

Figure 3



1 1 . 2 State the type of logic gate labelled **G**₁ in **Figure 3**.

[1 mark]

1 1 1.3 Write a Boolean expression to show how the output **D** is calculated from the inputs **A**, **B** and **C** in **Figure 3**.

You **must** use the correct symbols for the Boolean operators in your expression.

[2 marks]

D =

4



1 2 . 1

Figure 4 shows three programs (**A**, **B**, **C**) that add two numbers and output the result. The programs are written in different programming languages.

Figure 4

Α	В	С
x = 14 $y = 3$ $z = x + y$ $OUTPUT(z)$	LDR R0, #14 LDR R1, #3 ADD R2, R0, R1 STR R2, 63 OUT R2	0000 00001110 0001 00000011 0110 00010000 1010 10111111 1110 00000000

Identify the type of programming language used for each program shown in **Figure 4** by writing **A**, **B** or **C** in the correct row of **Table 2**.

You **must** only use each letter once.

[2 marks]

Table 2

	A, B or C
Assembly language	
High-level language	
Machine code	

1 2 . 2	State one advantage of writing programs in assembly language instead of a high-level language.
	[1 mark]



1 2 . 3	Shad	le one lozenge to show which statement is true about program translato		outside the box
			[1 mark]	
	A	A compiler translates all the original program code before execution.	0	
	В	Compiled code still needs the original program code to execute.	0	
	С	Compiled code executes more slowly than code that is being interpreted.	0	
	D	Interpreters generate machine code directly.	0	4
				1

Turn over for the next question

Turn over ▶

1 3.1	Describe two differences between a PAN and a WAN.	[2 marks]
	Difference 1	
	Difference 2	
1 3.2	Shade two lozenges to show which statements are true about LANs.	[2 marks]
	A LANs always use the Ethernet protocol.	0
	B LANs always use wireless technology.	0
	C LANs are usually controlled or owned by a single organisation.	0
	D LANs connect a maximum of 150 devices.	0
	E LANs cover one room, building or site.	0
1 3.3	State two differences between a bus topology and a star topology. Difference 1	[2 marks]
	Difference 2_	



1 3 . 4	HTTP is an example of a network protocol.	
	Define the term network protocol .	[2 marks]
3 . 5	The application layer and the transport layer are two of the layers within the TCP/IP model.	
	What are the names of the other two layers of the TCP/IP model?	[0
		[2 marks]
	1	
	2	
	2	

Turn over for the next question

Turn over ▶

1 4

A teacher keeps a record of books loaned to students.

The teacher uses a relational database containing three tables, **BookCopy**, **Student** and **Loan**. **Figure 5** shows some data from the tables.

Figure 5

BookCopy

CopyID	BookTitle
HT001	HTML 4 Fun
PB002	Python Basics
GC001	GCSE Computing
GC002	GCSE Computing
GC003	GCSE Computing
GC004	GCSE Computing
RG001	GCSE Revision Guide

Student

StudentID	FirstName	LastName	YearGroup
TUC004	Barry	Tucker	8
WAY002	Shania	Wayneton	10
KOW001	Bartek	Kowalski	11
AZE001	Faisal	Azeez	9
BAK007	Jolene	Baker	11
ANA002	Aisha	Anand	11
OKA003	Sani	Okafor	10

Loan

LoanID	StudentID	CopyID	DepositPaid
L0001	TUC004	HT001	0.50
L0002	WAY002	GC004	2.00
L0003	KOW001	GC001	2.00
L0004	TUC004	PB002	0.75
L0005	BAK007	RG001	2.50
L0006	BAK007	GC002	2.00
L0007	OKA003	GC003	2.00



1 4.1	Shade two lozenges to show which of the following statements are benefits of relational databases. [2 marks]		
	A	All the information can be stored in one table.	
	В	Redundant data is less likely to be stored.	
	С	Tables don't need primary keys.	
	D	There are less likely to be data inconsistencies.	
1 4.2	State	e one field in the Loan table that is a foreign key.	[1 mark]
1 4.3	State	e the most suitable data type for the DepositPaid field in the Loan tab	ole. [1 mark]
		Question 14 continues on the next page	



Figure 5 has been included again below.

Figure 5

BookCopy

CopyID	BookTitle	
HT001	HTML 4 Fun	
PB002	Python Basics	
GC001	GCSE Computing	
GC002	GCSE Computing	
GC003	GCSE Computing	
GC004	GCSE Computing	
RG001	GCSE Revision Guide	

Student

StudentID	FirstName	LastName	YearGroup
TUC004	Barry	Tucker	8
WAY002	Shania	Wayneton	10
KOW001	Bartek	Kowalski	11
AZE001	Faisal	Azeez	9
BAK007	Jolene	Baker	11
ANA002	Aisha	Anand	11
OKA003	Sani	Okafor	10

Loan

LoanID	StudentID	CopyID	DepositPaid
L0001	TUC004	HT001	0.50
L0002	WAY002	GC004	2.00
L0003	KOW001	GC001	2.00
L0004	TUC004	PB002	0.75
L0005	BAK007	RG001	2.50
L0006	BAK007	GC002	2.00
L0007	OKA003	GC003	2.00



1 4.4	Year 11 students must return their books after they have finished their GCSE exams.
	Using the database shown in Figure 5 , write an SQL query that lists all the loans for students who are in Year 11.
	The query must only return: • both names of the student • the ID of the book borrowed • the deposit paid.
	The results must be in ascending order of the students' last names. [6 marks]
1 4 . 5	Barry Tucker has returned their copy of the book Python Basics.
	Complete the SQL to delete the loan record for the book PB002. [2 marks]
	DELETE FROM
	WHERE



		_
1 5	Wearable devices, such as smartwatches and fitness trackers, have become more popular in recent years. This has led to an increase in the amount of personal, health-related data being collected by technology companies. Discuss the: • benefits of collecting personal, health-related data using wearable devices • data privacy issues related to the collection of personal, health-related data • legal issues related to the collection of personal, health-related data. [9 marks]	Do not write outside the box
		9



arks]		1 6.1
nark]		1 6.2
	Question 16 continues on the next page	




Do not write outside the 1 6 . 3 The network manager of a new computer games company, AQAware, is configuring box the network. They are concerned about potential cyber security threats that could affect the company's systems. Discuss the potential impact of the following threats on AQAware: weak and default passwords · misconfigured access rights • unpatched and/or outdated software. In your response you should include: how these threats could be exploited by an attacker how AQAware could protect themselves against these threats. [9 marks]

END OF QUESTIONS



12

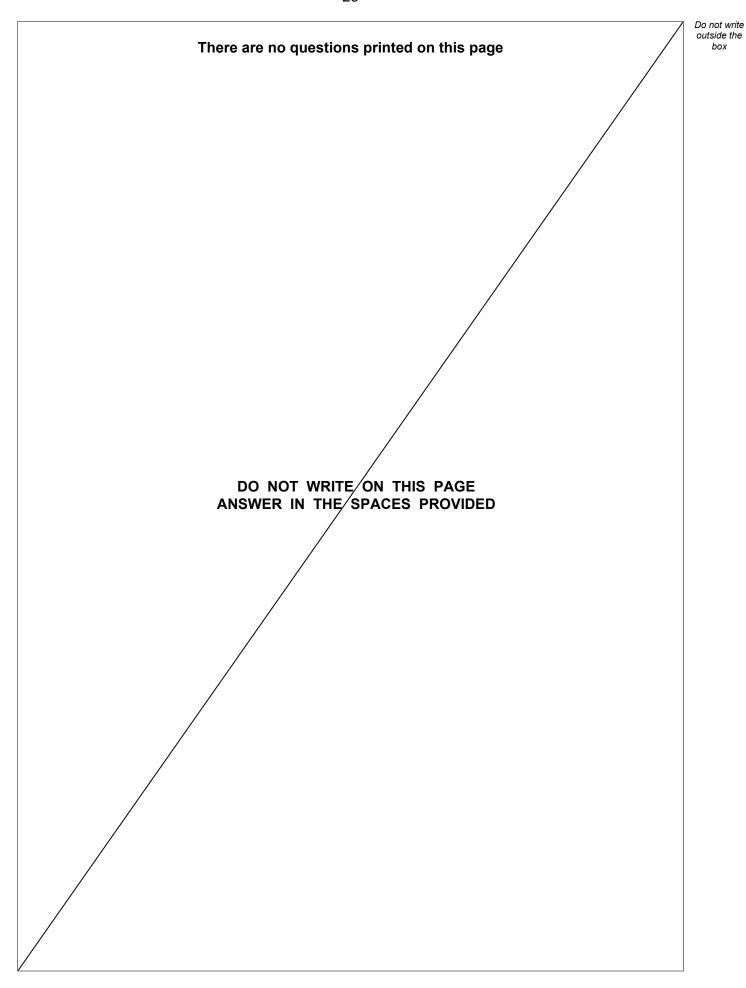



box

Question number	Additional page, if required. Write the question numbers in the left-hand margin.



Question number	Additional page, if required. Write the question numbers in the left-hand margin.



Question number	Additional page, if required. Write the question numbers in the left-hand margin.



Question number	Additional page, if required. Write the question numbers in the left-hand margin.



Do not write outside the There are no questions printed on this page DO NOT WRITE ON THIS PAGE ANSWER IN THE SPACES PROVIDED

Copyright information

For confidentiality purposes, all acknowledgements of third-party copyright material are published in a separate booklet. This booklet is published after each live examination series and is available for free download from www.aqa.org.uk.

Permission to reproduce all copyright material has been applied for. In some cases, efforts to contact copyright-holders may have been unsuccessful and AQA will be happy to rectify any omissions of acknowledgements. If you have any queries please contact the Copyright Team.

Copyright © 2023 AQA and its licensors. All rights reserved.



