



**General Certificate of Education (A-level)  
June 2011**

**Mathematics**

**MM05**

**(Specification 6360)**

**Mechanics 5**

**Final**

***Mark Scheme***

---

Mark schemes are prepared by the Principal Examiner and considered, together with the relevant questions, by a panel of subject teachers. This mark scheme includes any amendments made at the standardisation events which all examiners participate in and is the scheme which was used by them in this examination. The standardisation process ensures that the mark scheme covers the candidates' responses to questions and that every examiner understands and applies it in the same correct way. As preparation for standardisation each examiner analyses a number of candidates' scripts: alternative answers not already covered by the mark scheme are discussed and legislated for. If, after the standardisation process, examiners encounter unusual answers which have not been raised they are required to refer these to the Principal Examiner.

It must be stressed that a mark scheme is a working document, in many cases further developed and expanded on the basis of candidates' reactions to a particular paper. Assumptions about future mark schemes on the basis of one year's document should be avoided; whilst the guiding principles of assessment remain constant, details will change, depending on the content of a particular examination paper.

Further copies of this Mark Scheme are available from: [aqa.org.uk](http://aqa.org.uk)

Copyright © 2011 AQA and its licensors. All rights reserved.

**Copyright**

AQA retains the copyright on all its publications. However, registered centres for AQA are permitted to copy material from this booklet for their own internal use, with the following important exception: AQA cannot give permission to centres to photocopy any material that is acknowledged to a third party even for internal use within the centre.

Set and published by the Assessment and Qualifications Alliance.

## Key to mark scheme abbreviations

M	mark is for method
m or dM	mark is dependent on one or more M marks and is for method
A	mark is dependent on M or m marks and is for accuracy
B	mark is independent of M or m marks and is for method and accuracy
E	mark is for explanation
✓ or ft or F	follow through from previous incorrect result
CAO	correct answer only
CSO	correct solution only
AWFW	anything which falls within
AWRT	anything which rounds to
ACF	any correct form
AG	answer given
SC	special case
OE	or equivalent
A2,1	2 or 1 (or 0) accuracy marks
-x EE	deduct x marks for each error
NMS	no method shown
PI	possibly implied
SCA	substantially correct approach
c	candidate
sf	significant figure(s)
dp	decimal place(s)

## No Method Shown

Where the question specifically requires a particular method to be used, we must usually see evidence of use of this method for any marks to be awarded.

Where the answer can be reasonably obtained without showing working and it is very unlikely that the correct answer can be obtained by using an incorrect method, we must award **full marks**. However, the obvious penalty to candidates showing no working is that incorrect answers, however close, earn **no marks**.

Where a question asks the candidate to state or write down a result, no method need be shown for full marks.

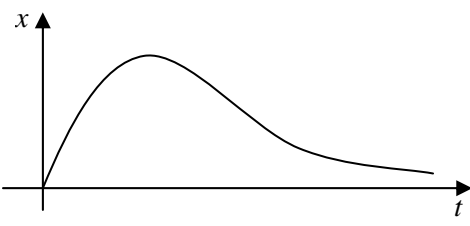
Where the permitted calculator has functions which reasonably allow the solution of the question directly, the correct answer without working earns **full marks**, unless it is given to less than the degree of accuracy accepted in the mark scheme, when it gains **no marks**.

**Otherwise we require evidence of a correct method for any marks to be awarded.**

## MM05

Q	Solution	Marks	Total	Comments
1(a)	$f = \frac{1}{3}$	B1	1	Accept 0.333
(b)	$3 = 2\pi\sqrt{\frac{L}{9.8}}$ $L = 2.23$ metres	M1 A1	2	
<b>Total</b>			<b>3</b>	
2(a)	$v^2 = \omega^2(a^2 - x^2)$ $25 = \omega^2(a^2 - 9)$ $\frac{25}{4} = \omega^2(a^2 - 36)$ $4 = \frac{a^2 - 9}{a^2 - 36}$ $4a^2 - 144 = a^2 - 9$ $3a^2 = 135$ $a^2 = 45$ $a = 3\sqrt{5}$ metres	M1 M1 m1 A1	4	AG
(b)	max speed = $\omega a$ $\omega^2 = \frac{25}{45 - 9} = \frac{25}{36}$ $\omega = \frac{5}{6}$ max speed = $a\omega = 3\sqrt{5} \times \frac{5}{6}$ $= \frac{5\sqrt{5}}{2}$	M1 A1 M1 A1	4	Accept 5.59; ft slip in $\omega$
<b>Total</b>			<b>8</b>	

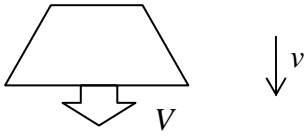
MM05 (cont)

Q	Solution	Marks	Total	Comments
3(a)(i)	$m\ddot{x} = -\frac{\lambda x}{a}$ $= -amn^2 \frac{x}{a}$ $\ddot{x} = -n^2 x \quad \text{SHM}$	M1 A1	2	
(ii)	$T = \frac{2\pi}{n}$	B1	1	
(b)(i)	$m\ddot{x} = -amn^2 \frac{x}{a} - mkv$ $\ddot{x} + k\dot{x} + n^2 x = 0$	M1 A1 A1	3	3 appropriate terms attempted Signs consistent AG
(ii)	$p^2 + \frac{5n}{2}p + n^2 = 0$ $\left(p + \frac{5n}{4}\right)^2 - \frac{9n^2}{16} = 0$ $p + \frac{5n}{4} = \pm \frac{3n}{4}, \quad p = -2n, \quad p = -\frac{n}{2}$ $x = Ae^{-2nt} + Be^{-\frac{n}{2}t}$ $t = 0, \quad x = 0: \quad A + B = 0$ $t = 0, \quad \dot{x} = U$ $\dot{x} = -2nAe^{-2nt} - \frac{n}{2}Be^{-\frac{n}{2}t}$ $U = -2nA - \frac{n}{2}B$ $A = -\frac{2U}{3n} \quad B = \frac{2U}{3n}$ $x = \frac{2U}{3n} \left( e^{-\frac{nt}{2}} - e^{-2nt} \right)$	M1 A1 M1 m1 A1,A1	6	$2p^2 + 5np + 2n^2 = 0$ $(2p+n)(p+2n) = 0$ $p = -\frac{n}{2}, p = -2n$
(iii)	 <p>Heavy damping</p>	B1 B1	2	Accept sketch with correct shape not reaching origin but not crossing x-axis elsewhere Accept reference to real distinct roots of auxiliary equation
<b>Total</b>			<b>14</b>	Independent of previous mark

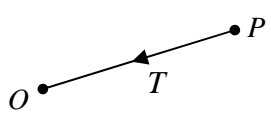

MM05 (cont)

Q	Solution	Marks	Total	Comments
4(a)	$h = b \cot \theta$	B1	6	OE
	$y = a \cos \theta$	B1		OE
	$V = mgh + 2mg(h - y)$	M1 A1 A1		Top rod Other rods
	$V = mg(h + 2h - 2y)$			
	$V = mg(3b \cot \theta - 2a \cos \theta)$	A1		AG
(b)	$\frac{dv}{d\theta} = mg(3b(-\operatorname{cosec}^2 \theta) + 2a \sin \theta)$	M1A2	5	AG
	$0 = -3b \operatorname{cosec}^2 \theta + 2a \sin \theta$	m1		
	$\sin^3 \theta = \frac{3b}{2a}$	A1		
(c)(i)	$b = \frac{a}{3} \quad \sin^3 \theta = \frac{1}{2}$	M1 A1,A1	3	- 1 if degrees
	$\sin \theta = 0.7937$ $\theta = 0.917$ or $\theta = 2.22$			
(ii)	$\frac{d^2v}{d\theta^2} = mg(2a \cos \theta + 2a \operatorname{cosec} \theta \operatorname{cosec} \theta \cot \theta)$	M1A1	3	AG
	$= mg\left(2a \cos \theta + 2a \frac{\cos \theta}{\sin^3 \theta}\right)$			
	$= mg(2a \cos \theta + 4a \cos \theta)$			
	$= 6mga \cos \theta$	A1		
(iii)	$\theta = 0.917, \ddot{\theta} = 3.65mga, \text{ stable}$	B1	2	
	$\theta = 2.22, \ddot{\theta} = -3.65mga, \text{ unstable}$	B1		
	<b>Total</b>		<b>19</b>	

MM05 (cont)

Q	Solution	Marks	Total	Comments
5(a)	 $Mg_1 \delta t = (M + \delta M)(v + \delta v) - Mv - \delta M(v + V)$ $Mg_1 \delta t = Mv + M\delta v + v\delta M - Mv - v\delta M - V\delta M$ $Mg_1 \delta t = M\delta v - V\delta M$ $Mg_1 + \frac{VdM}{dt} = \frac{Mdv}{dt}$ $\frac{dM}{dt} = -\lambda$ $M \frac{dv}{dt} = Mg_1 - \lambda V$	M1 A2 M1 B1 A1	6	AG
(b)(i)	$m = 1800 - 50t$ $(1800 - 50t) \frac{dv}{dt} = (1800 - 50t)g_1 - 50 \times 360$ $(36 - t) \frac{dv}{dt} = (36 - t)g_1 - 360$ $\frac{dv}{dt} = 1.62 - \frac{360}{36 - t}$	B1 M1 A1 A1	4	Substitute AG
(ii)	$\int_{75}^v dv = \int_0^t \left( g_1 - \frac{360}{36 - t} \right) dt$ $[v]_{75}^v = [g_1 t + 360 \ln(36 - t)]_0^t$ $v - 75 = g_1 t + 360 \ln \frac{36 - t}{36}$ $v = 75 + 1.62t + 360 \ln \frac{36 - t}{36}$	M1A1 A1	3	For A1, require constant or presence of limits AG
(c)	$t = 7.5, \quad v = 3.05$ $v^2 = u^2 + 2as: \quad v^2 = 3.05^2 + 2 \times 5 \times 1.62$ $v = 5.05 \text{ ms}^{-1}$	B1 M1 A1	3	
	<b>Total</b>		<b>16</b>	

MM05 (cont)

Q	Solution	Marks	Total	Comments
6(a)(i)		B1	1	
(ii)		B1	1	
(b)	For $Q$ , $T - mg = m\ddot{x}$ $\ddot{x} = \ddot{r} \therefore T - mg = m\ddot{r}$	M1 A1	2	AG
(c)	Consider $P$ : $-T = m(\ddot{r} - r\dot{\theta}^2)$ $-mg = 2m\ddot{r} - mr\dot{\theta}^2$ $2\ddot{r} = r\dot{\theta}^2 - g$	M1A1 m1 A1	4	AG
(d)	Transverse acceleration = 0 $\Rightarrow$ $\frac{1}{r} \left( \frac{d}{dt}(r^2\dot{\theta}) \right) = 0$ $r^2\dot{\theta} = \text{constant}$ Initially $r^2\dot{\theta} = a \times 2\sqrt{ag}$ $\therefore \dot{\theta} = \frac{2a\sqrt{ag}}{r^2}$ $2\ddot{r} = r \left( \frac{2a\sqrt{ag}}{r^2} \right)^2 - g = \frac{4a^3g}{r^3} - g$	B1 B1 M1A1 A1	5	AG
(e)	Initially $\left. \begin{matrix} r = a \\ \dot{r} = 0 \end{matrix} \right\} \therefore \frac{4a^3}{r^3} > 1$ $\ddot{r} > 0$ $\therefore$ direction away from $O$	M1 A1	2	
	<b>Total</b>		<b>15</b>	
	<b>TOTAL</b>		<b>75</b>	